

For KT-ANGLE-MINI & KT-ANGLE-MINI+CLIPS

Instructions for mounting a Desktop Mini with KT-ANGLE-MINI & KT-ANGLE-MINI+CLIPS kits.

- KT-ANGLE-MINI+CLIPS is identical to KT-ANGLE-MINI with the addition of two cable management clips.
- Please read directions in full before beginning assembly.

KT-ANGLE-MINI Kit Contents:


1. BKT-00001 – 1x
2. PAD-00003 – 4x
3. 99060073 (Instruction Sheet) – 1x

KT-ANGLE-MINI+CLIPS Kit Contents:

1. BKT-00001 – 1x
2. PAD-00003 – 4x
3. MISC-AKKL-2140-RT (Clips) – 2x
4. 99060073 (Instruction Sheet) – 1x


1 Prior to installing Dual Lock on any surface, ensure that the surface is free of all dust, debris and moisture.

2 Remove the release liner from the back of PAD-00003 and install it on the back of the Desktop Mini housing, as shown in Figure 1.


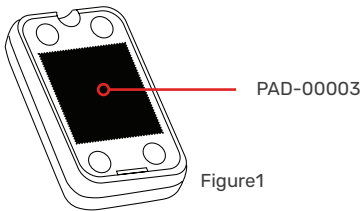


Remove the release liner from the back of another PAD-00003 and install it on BKT-00001 as shown in Figure 2.

NOTE: Install on bracket face that DOES NOT have holes.

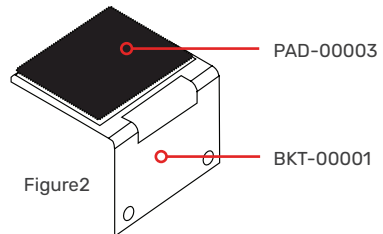

3 Mount BKT-00001 in desired location using remaining PAD-00003 Dual Lock strips; affixing one to BKT-00001, as shown in Figure 3, and the remaining strip to the surface of the desired mounting location.

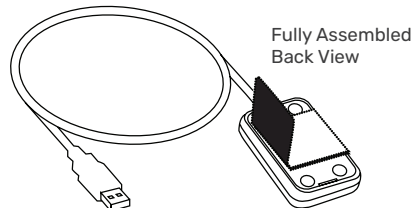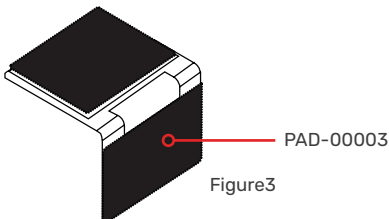

ALTERNATIVE MOUNTING OPTIONS

1. You may optionally use your own bolts or screws to mount the bracket to your desired mounting location using the included bracket mounting holes.
2. You may optionally use the provided Dual Lock strips to flat mount the reader to any flat surface.

For KT-FLAT-MINI


Instructions for mounting a Desktop Mini with KT-FLAT-MINI kit.

- Please read directions in full before beginning assembly.


KT-FLAT-MINI Kit Contains:

1. PAD-00003 – 2x
2. 99060073 (Instruction Sheet) – 1x

- 1** Prior to installing Dual Lock on any surface, ensure that the surface is free of all dust, debris and moisture.
- 2** Remove the release liner from the back of PAD-00003 and install it to the back of the Desktop Mini housing as shown in Figure 4.

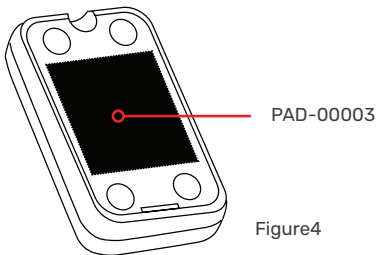

- 3** Remove the release liner from the back of another PAD-00003 and install it on the surface of the desired mounting location.

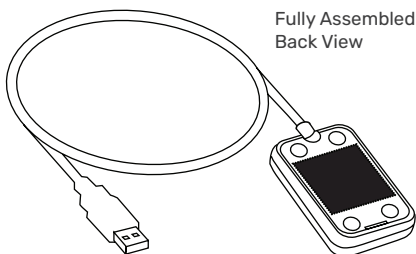

99060073